CS 520

Theory and Practice of Software Engineering
Fall 2017

OO design principles

September 14, 2017

Today

- Code review and (re)design of an MVC application
- OO design principles
  - Information hiding (and encapsulation)
  - Polymorphism
  - Open/closed principle
  - Inheritance in Java
  - The diamond of death
  - Liskov substitution principle
  - Composition/aggregation over inheritance

Let's review the code of the following application

Source code available on the course web site

OO design principles

- **Information hiding (and encapsulation)**
- Polymorphism
- Open/closed principle
- Inheritance in Java
- The diamond of death
- Liskov substitution principle
- Composition/aggregation over inheritance

Information hiding

MyClass
+ nElem : int + capacity : int + top : int + elems : int[] + canResize : bool
+ resize(s:int):void + push(e:int):void + capacityLeft():int + getNumElem():int + pop():int + getElems():int[]

```
public class MyClass {
  public int nElem;
  public int capacity;
  public int top;
  public int[] elems;
  public boolean canResize;
  ...
  public void resize(int s){...}
  public void push(int e){...}
  public int capacityLeft(){...}
  public int getNumElem(){...}
  public int pop(){...}
  public int[] getElems(){...}
}
```

Information hiding

MyClass
+ nElem : int + capacity : int + top : int + elems : int[] + canResize : bool
+ resize(s:int):void + push(e:int):void + capacityLeft():int + getNumElem():int + pop():int + getElems():int[]

```
public class MyClass {
  public int nElem;
  public int capacity;
  public int top;
  public int[] elems;
  public boolean canResize;
  ...
  public void resize(int s){...}
  public void push(int e){...}
  public int capacityLeft(){...}
  public int getNumElem(){...}
  public int pop(){...}
  public int[] getElems(){...}
}
```

What does MyClass do?

Information hiding

Stack
+ nElem : int + capacity : int + top : int + elems : int[] + canResize : bool
+ resize(s:int):void + push(e:int):void + capacityLeft():int + getNumElem():int + pop():int + getElems():int[]

```
public class Stack {
  public int nElem;
  public int capacity;
  public int top;
  public int[] elems;
  public boolean canResize;
  ...
  public void resize(int s){...}
  public void push(int e){...}
  public int capacityLeft(){...}
  public int getNumElem(){...}
  public int pop(){...}
  public int[] getElems(){...}
}
```

Anything that could be improved in this implementation?

Information hiding

Stack
+ nElem : int + capacity : int + top : int + elems : int[] + canResize : bool
+ resize(s:int):void + push(e:int):void + capacityLeft():int + getNumElem():int + pop():int + getElems():int[]

Stack
- elems : int[] ...
+ push(e:int):void + pop():int ...

Information hiding:

- Reveal as little information about internals as possible.
- Segregate public interface and implementation details.
- Reduces complexity.

Information hiding vs. visibility

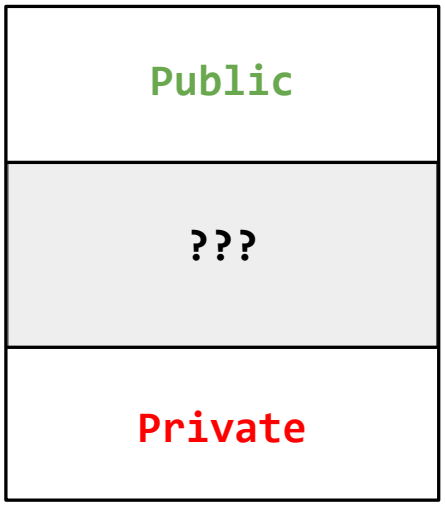

Information hiding vs. visibility

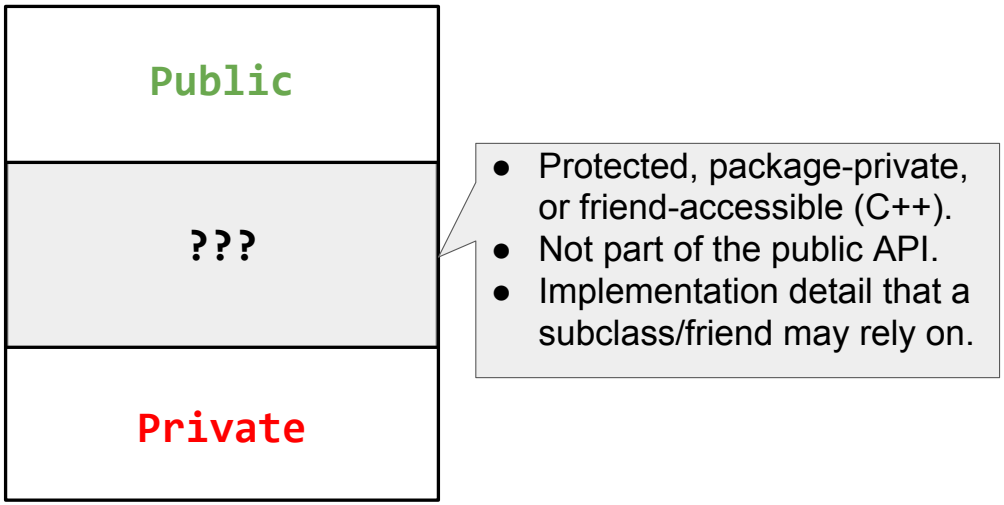

OO design principles

- Information hiding (and encapsulation)
- **Polymorphism**
- Open/closed principle
- Inheritance in Java
- The diamond of death
- Liskov substitution principle
- Composition/aggregation over inheritance

A little refresher: what is Polymorphism?

A little refresher: what is Polymorphism?

An object's ability to provide different behaviors.

Types of polymorphism

- Ad-hoc polymorphism (e.g., operator overloading)
  - `a + b` ⇒ String vs. int, double, etc.
- Subtype polymorphism (e.g., method overriding)
  - `Object obj = ...;` ⇒ toString() can be overridden in subclasses and therefore provide a different behavior.
    `obj.toString();`
- Parametric polymorphism (e.g., Java generics)
  - `class LinkedList<E> {` ⇒ A LinkedList can store elements regardless of their type but still provide full type safety.
    `void add(E) {...}`
    `E get(int index) {...}`

A little refresher: what is Polymorphism?

An object's ability to provide different behaviors.

Types of polymorphism

- Subtype polymorphism (e.g., method overriding)
  - `Object obj = ...;` ⇒ toString() can be overridden in subclasses and therefore provide a different behavior.
    `obj.toString();`

Subtype polymorphism is essential to many OO design principles.

OO design principles

- Information hiding (and encapsulation)
- Polymorphism
- **Open/closed principle**
- Inheritance in Java
- The diamond of death
- Liskov substitution principle
- Composition/aggregation over inheritance

Open/closed principle

Software entities (classes, components, etc.) should be:

- **open** for extensions
- **closed** for modifications

```
public static void draw(Object o) {
  if (o instanceof Square) {
    drawSquare((Square) o)
  } else if (o instanceof Circle) {
    drawCircle((Circle) o);
  } else {
    ...
  }
}
```

Good or bad design?



Open/closed principle

Software entities (classes, components, etc.) should be:

- **open** for extensions
- **closed** for modifications

```
public static void draw(Object o) {
  if (o instanceof Square) {
    drawSquare((Square) o)
  } else if (o instanceof Circle) {
    drawCircle((Circle) o);
  } else {
    ...
  }
}
```

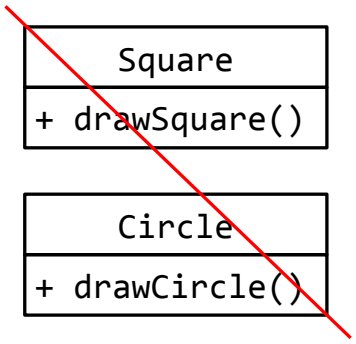

Violates the open/closed principle!

Open/closed principle

Software entities (classes, components, etc.) should be:

- **open** for extensions
- **closed** for modifications

```
public static void draw(Object s) {
  if (s instanceof Shape) {
    s.draw();
  } else {
    ...
  }
}
```

```
public static void draw(Shape s) {
  s.draw();
}
```

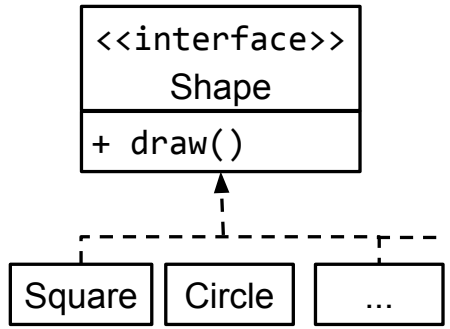

OO design principles

- Information hiding (and encapsulation)
- Polymorphism
- Open/closed principle
- **Inheritance in Java**
- The diamond of death
- Liskov substitution principle
- Composition/aggregation over inheritance

Inheritance: (abstract) classes and interfaces



Inheritance: (abstract) classes and interfaces

LinkedList extends SequentialList

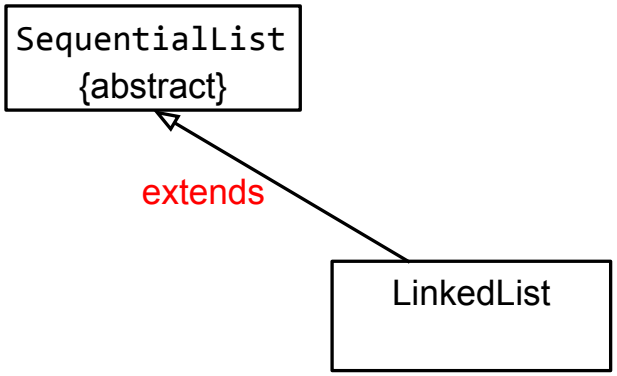

Inheritance: (abstract) classes and interfaces

LinkedList extends SequentialList

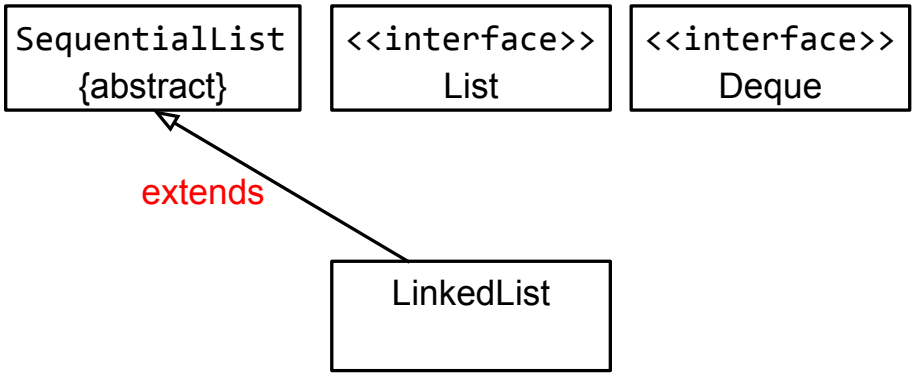

Inheritance: (abstract) classes and interfaces

LinkedList extends SequentialList implements List, Deque

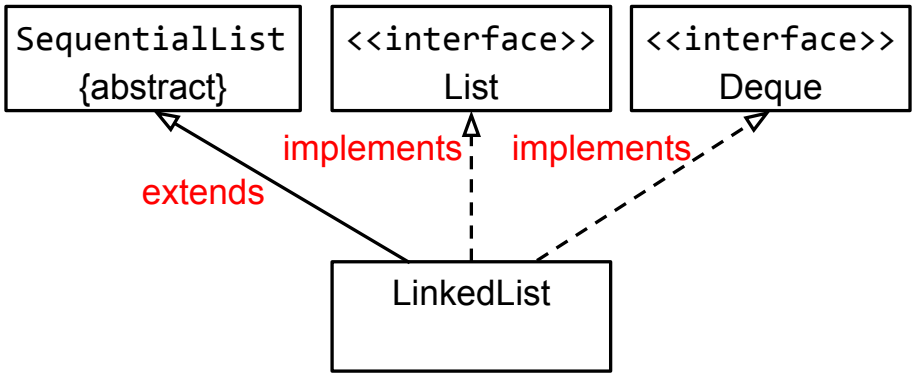

Inheritance: (abstract) classes and interfaces

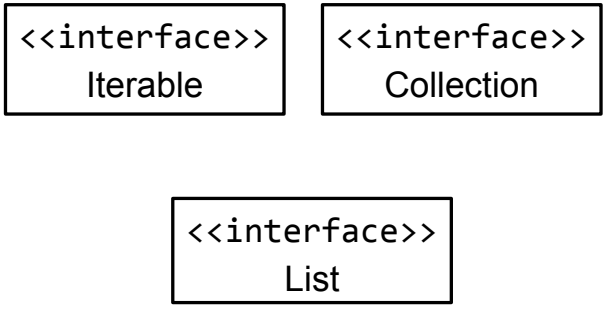

Inheritance: (abstract) classes and interfaces

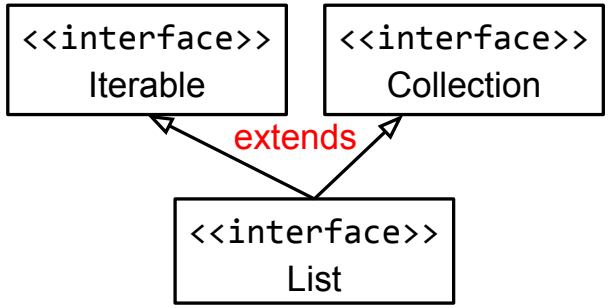

List extends Iterable, Collection

Inheritance: (abstract) classes and interfaces

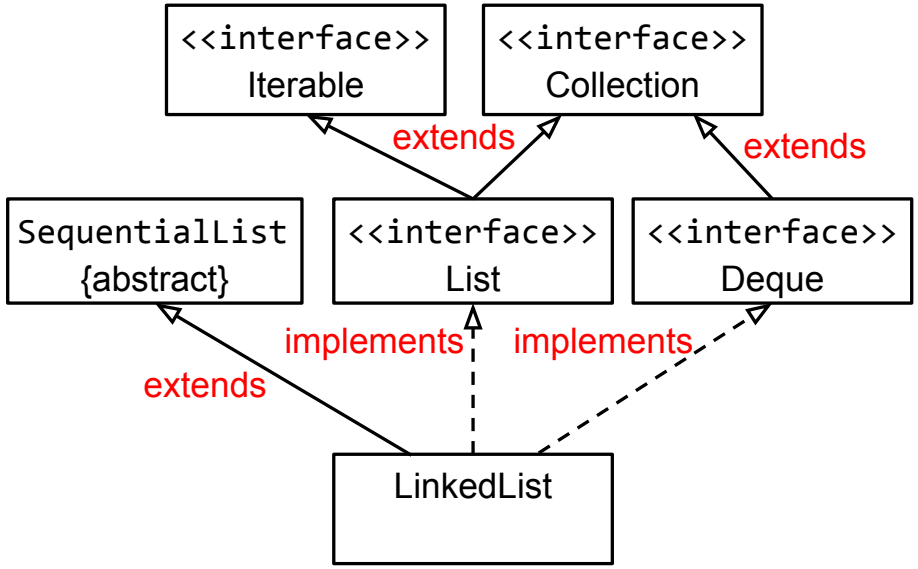

OO design principles

- Information hiding (and encapsulation)
- Polymorphism
- Open/closed principle
- Inheritance in Java
- **The diamond of death**
- Liskov substitution principle
- Composition/aggregation over inheritance

The “diamond of death”: the problem

```
...
A a = new D();
int num = a.getNum();
...
```

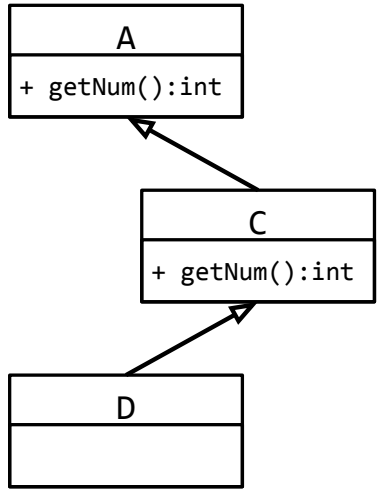

The “diamond of death”: the problem

```
...
A a = new D();
int num = a.getNum();
...
```

Which getNum() method should be called?

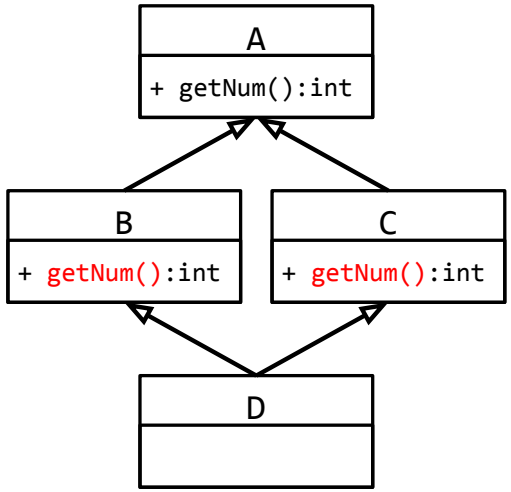

The “diamond of death”: concrete example

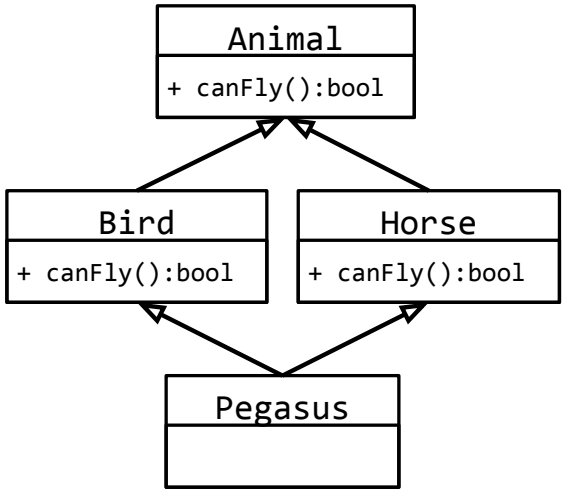

Can this happen in Java? Yes, with default methods in Java 8.

OO design principles

- Information hiding (and encapsulation)
- Polymorphism
- Open/closed principle
- Inheritance in Java
- The diamond of death
- **Liskov substitution principle**
- Composition/aggregation over inheritance

Design principles: Liskov substitution principle

Motivating example

We know that a square is a special kind of a rectangle. So, which of the following OO designs makes sense?





Design principles: Liskov substitution principle

Subtype requirement

Let object x be of type T1 and object y be of type T2. Further, let T2 be a subtype of T1 (T2 <: T1). Any provable property about objects of type T1 should be true for objects of type T2.

Is the subtype requirement fulfilled?

Design principles: Liskov substitution principle

Subtype requirement

Let object x be of type T1 and object y be of type T2. Further, let T2 be a subtype of T1 (T2 <: T1). Any provable property about objects of type T1 should be true for objects of type T2.

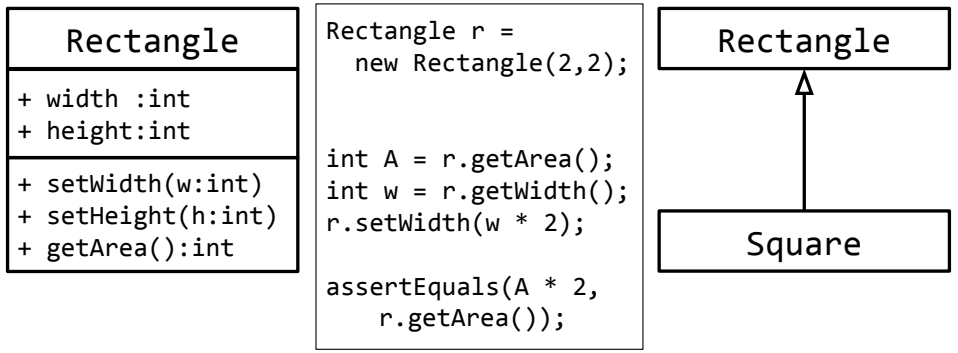

Design principles: Liskov substitution principle

Subtype requirement

Let object x be of type T1 and object y be of type T2. Further, let T2 be a subtype of T1 (T2 <: T1). Any provable property about objects of type T1 should be true for objects of type T2.

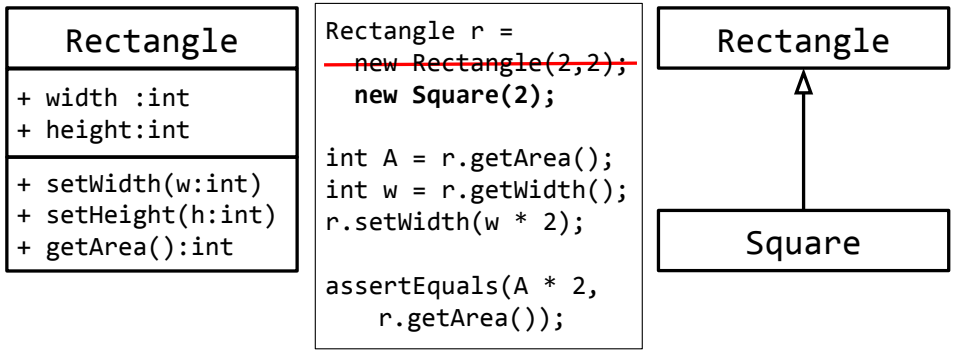

Design principles: Liskov substitution principle

Subtype requirement

Let object x be of type T1 and object y be of type T2. Further, let T2 be a subtype of T1 (T2 <: T1). Any provable property about objects of type T1 should be true for objects of type T2.

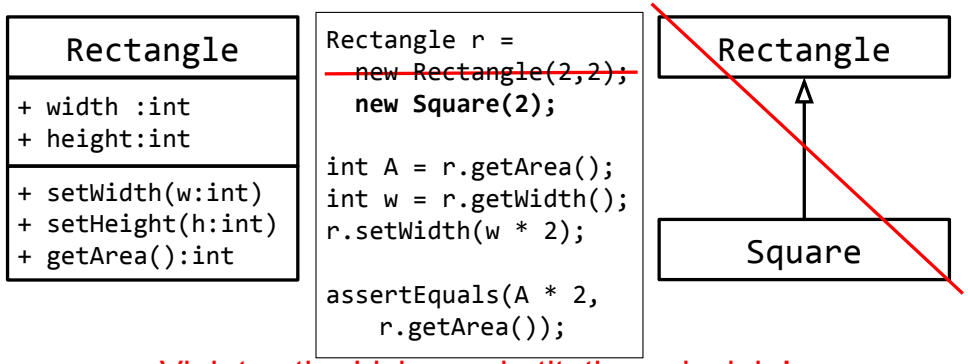

Violates the Liskov substitution principle!

Design principles: Liskov substitution principle

Subtype requirement

Let object x be of type T1 and object y be of type T2. Further, let T2 be a subtype of T1 (T2 <: T1). Any provable property about objects of type T1 should be true for objects of type T2.



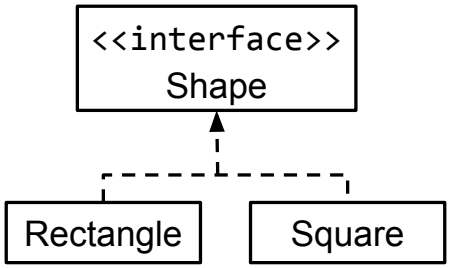

OO design principles

- Information hiding (and encapsulation)
- Polymorphism
- Open/closed principle
- Inheritance in Java
- The diamond of death
- Liskov substitution principle
- **Composition/aggregation over inheritance**

Inheritance vs. (Aggregation vs. *Composition*)




```
public class Student
    extends Person{
 public Student(){
 }
 ...
}
```

is-a relationship




```
public class Bank {
 Customer c;
 public Bank(Customer c){
  this.c = c;
 }
 ...
}
```




```
public class Building {
 Room r;
 public Building(){
  this.r = new Room();
 }
 ...
}
```

has-a relationship

Design choice: inheritance or composition?




```
public class Stack<E>
    extends LinkedList<E> {
  ...
}
```

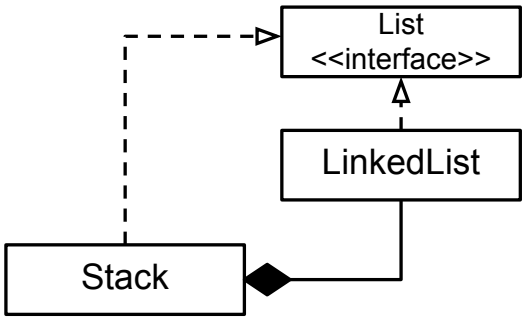


```
public class Stack<E> implements List<E> {
  private List<E> l = new LinkedList<>();
  ...
}
```

Hmm, both designs seem valid -- what are pros and cons?

Design choice: inheritance or composition?



Pros

- No delegation methods required.
- Reuse of common state and behavior.

Cons

- Exposure of all inherited methods (a client might rely on this particular superclass -> can't change it later).
- Changes in superclass are likely to break subclasses.

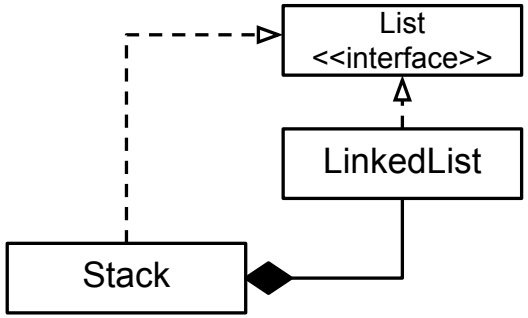

Pros

- Highly flexible and configurable: no additional subclasses required for different compositions.

Cons

- All interface methods need to be implemented -> delegation methods required, even for code reuse.

Composition/aggregation over inheritance allows more flexibility.

OO design principles: summary

- Information hiding (and encapsulation)
- Open/closed principle
- Liskov substitution principle
- Composition/aggregation over inheritance