

CS 520

Theory and Practice of Software Engineering
Fall 2017


OO design principles

September 14, 2017

Today

- Code review and (re)design of an MVC application
- OO design principles
 - Information hiding (and encapsulation)
 - Polymorphism
 - Open/closed principle
 - Inheritance in Java
 - The diamond of death
 - Liskov substitution principle
 - Composition/aggregation over inheritance

Let's review the code of the following application

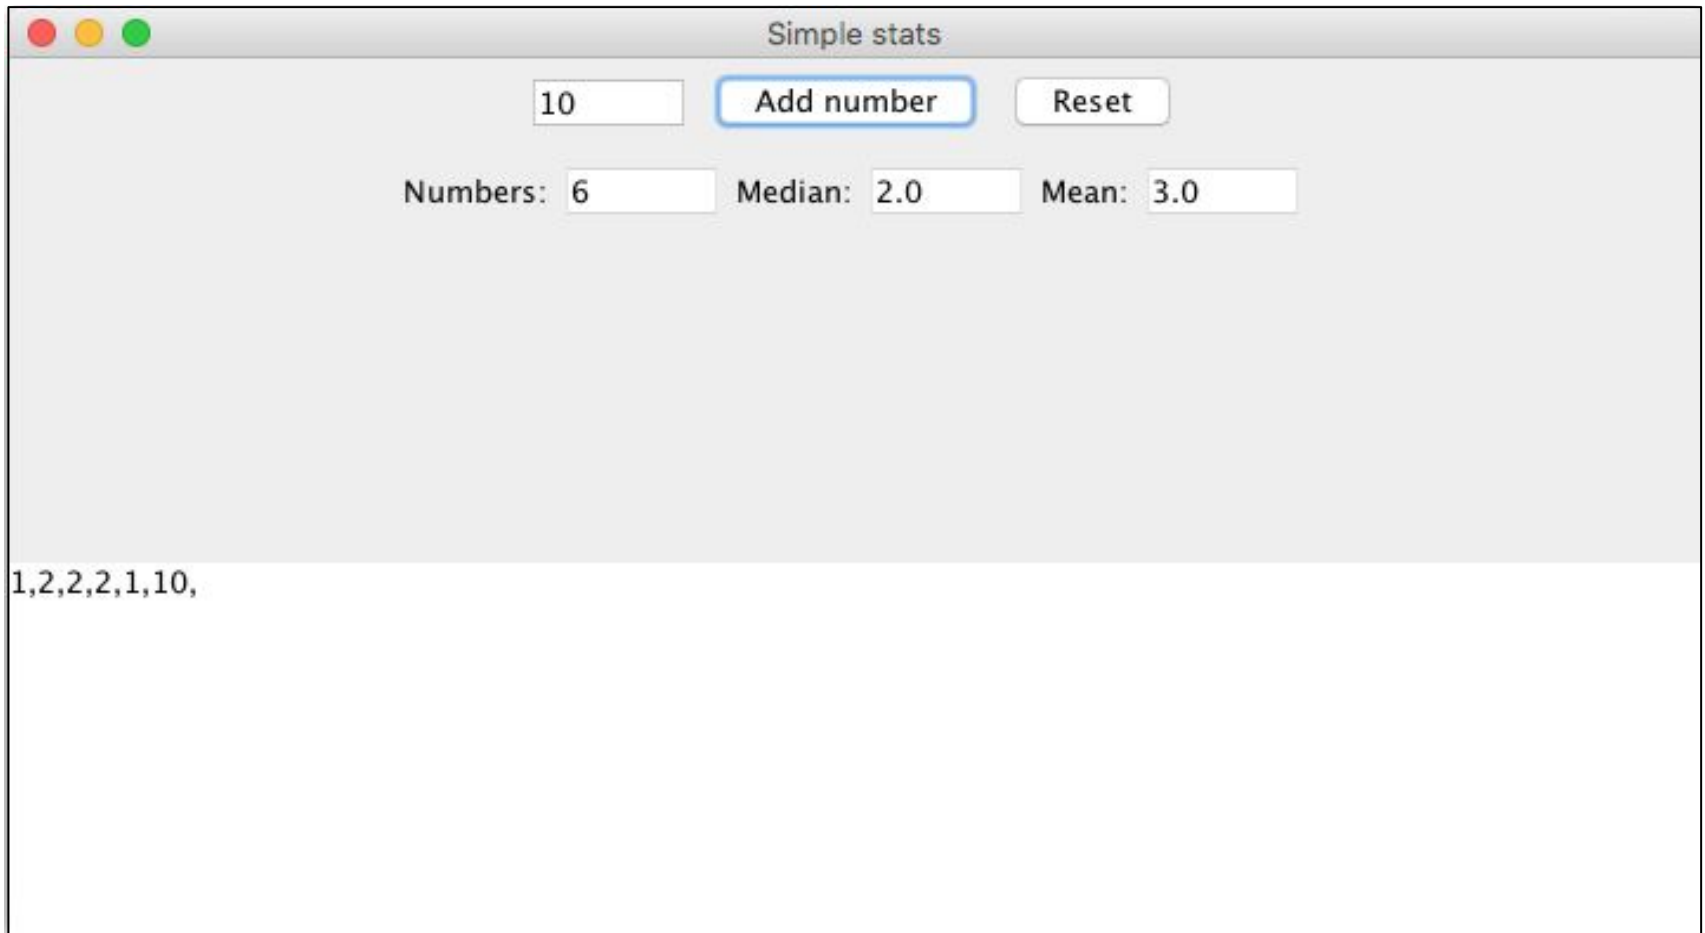

Source code available on the course web site

OO design principles

- **Information hiding (and encapsulation)**
- Polymorphism
- Open/closed principle
- Inheritance in Java
- The diamond of death
- Liskov substitution principle
- Composition/aggregation over inheritance

Information hiding

MyClass
+ nElem : int + capacity : int + top : int + elems : int[] + canResize : bool
+ resize(s:int):void + push(e:int):void + capacityLeft():int + getNumElem():int + pop():int + getElems():int[]

```
public class MyClass {  
    public int nElem;  
    public int capacity;  
    public int top;  
    public int[] elems;  
    public boolean canResize;  
    ...  
    public void resize(int s){...}  
    public void push(int e){...}  
    public int capacityLeft(){...}  
    public int getNumElem(){...}  
    public int pop(){...}  
    public int[] getElems(){...}  
}
```

Information hiding

MyClass
+ nElem : int + capacity : int + top : int + elems : int[] + canResize : bool
+ resize(s:int):void + push(e:int):void + capacityLeft():int + getNumElem():int + pop():int + getElems():int[]

```
public class MyClass {  
    public int nElem;  
    public int capacity;  
    public int top;  
    public int[] elems;  
    public boolean canResize;  
  
    ...  
  
    public void resize(int s){...}  
    public void push(int e){...}  
    public int capacityLeft(){...}  
    public int getNumElem(){...}  
    public int pop(){...}  
    public int[] getElems(){...}  
}
```

What does MyClass do?

Information hiding

Stack
+ nElem : int
+ capacity : int
+ top : int
+ elems : int[]
+ canResize : bool
+ resize(s:int):void
+ push(e:int):void
+ capacityLeft():int
+ getNumElem():int
+ pop():int
+ getElems():int[]

```
public class Stack {
    public int nElem;
    public int capacity;
    public int top;
    public int[] elems;
    public boolean canResize;
    ...
    public void resize(int s){...}
    public void push(int e){...}
    public int capacityLeft(){...}
    public int getNumElem(){...}
    public int pop(){...}
    public int[] getElems(){...}
}
```

Anything that could be improved in this implementation?

Information hiding


Stack
+ nElem : int + capacity : int + top : int + elems : int[] + canResize : bool
+ resize(s:int):void + push(e:int):void + capacityLeft():int + getNumElem():int + pop():int + getElems():int[]

Stack
- elems : int[] ...
+ push(e:int):void + pop():int ...


Information hiding:

- Reveal as little information about internals as possible.
- Segregate public interface and implementation details.
- Reduces complexity.

Information hiding vs. visibility

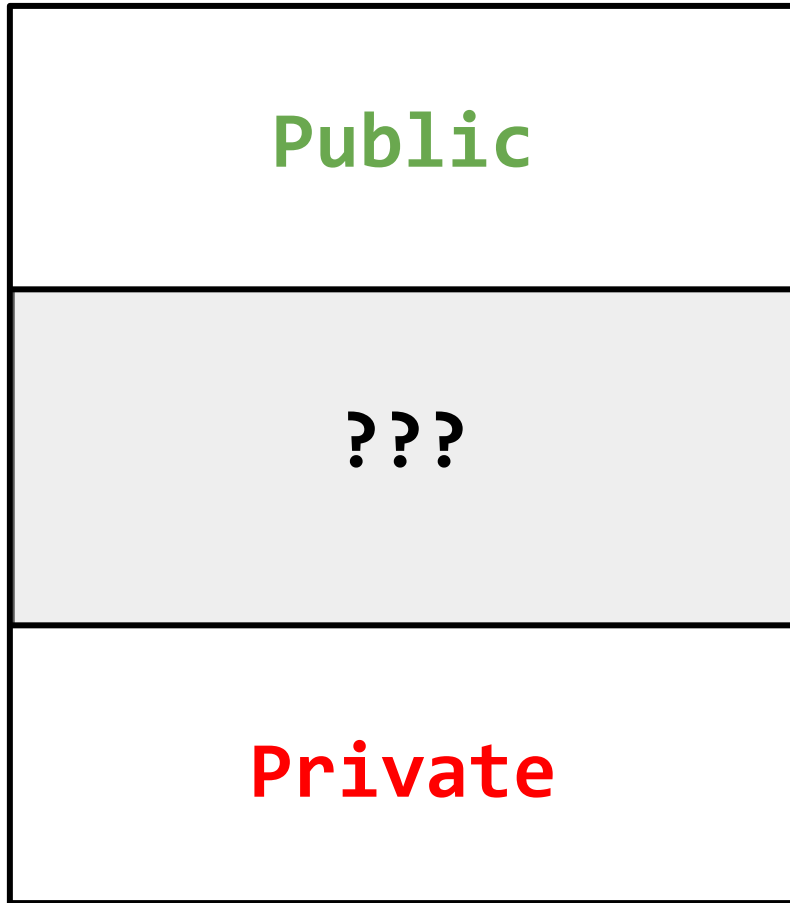

Information hiding vs. visibility

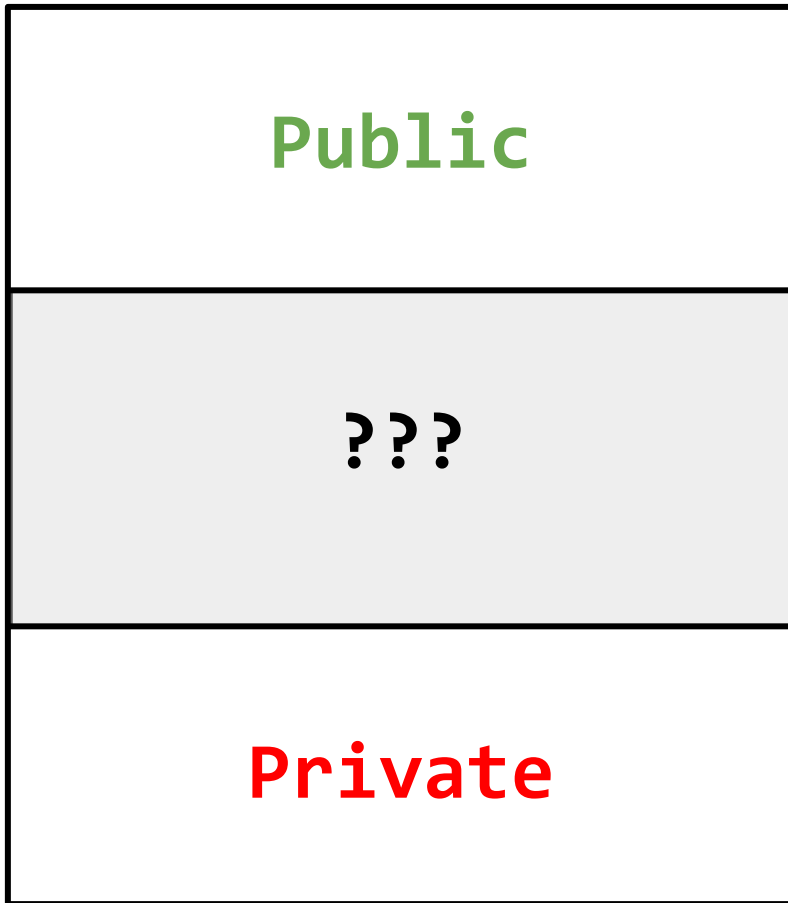

- Protected, package-private, or friend-accessible (C++).
- Not part of the public API.
- Implementation detail that a subclass/friend may rely on.

OO design principles

- Information hiding (and encapsulation)
- **Polymorphism**
- Open/closed principle
- Inheritance in Java
- The diamond of death
- Liskov substitution principle
- Composition/aggregation over inheritance

A little refresher: what is Polymorphism?



A little refresher: what is Polymorphism?

An object's ability to provide different behaviors.

Types of polymorphism

- Ad-hoc polymorphism (e.g., operator overloading)
 - `a + b` ⇒ String vs. int, double, etc.
- Subtype polymorphism (e.g., method overriding)
 - `Object obj = ...;` ⇒ `toString()` can be overridden in subclasses
`obj.toString();` and therefore provide a different behavior.
- Parametric polymorphism (e.g., Java generics)
 - `class LinkedList<E> {` ⇒ A LinkedList can store elements
`void add(E) {...}` regardless of their type but still
`E get(int index) {...}` provide full type safety.

A little refresher: what is Polymorphism?

An object's ability to provide different behaviors.

Types of polymorphism

- Subtype polymorphism (e.g., method overriding)
 - `Object obj = ...;` \Rightarrow `toString()` can be overridden in subclasses and therefore provide a different behavior.
`obj.toString();`

Subtype polymorphism is essential to many OO design principles.

OO design principles

- Information hiding (and encapsulation)
- Polymorphism
- **Open/closed principle**
- Inheritance in Java
- The diamond of death
- Liskov substitution principle
- Composition/aggregation over inheritance



Open/closed principle

Software entities (classes, components, etc.) should be:

- **open** for extensions
- **closed** for modifications

```
public static void draw(Object o) {  
    if (o instanceof Square) {  
        drawSquare((Square) o)  
    } else if (o instanceof Circle) {  
        drawCircle((Circle) o);  
    } else {  
        ...  
    }  
}
```

Good or bad design?

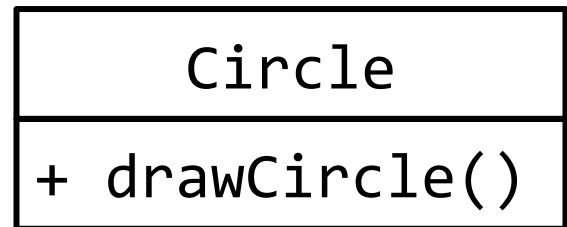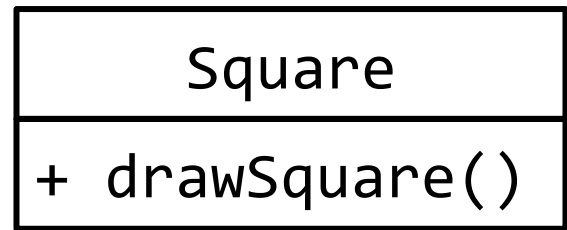


Open/closed principle

Software entities (classes, components, etc.) should be:

- **open** for extensions
- **closed** for modifications

```
public static void draw(Object o) {  
    if (o instanceof Square) {  
        drawSquare((Square) o)  
    } else if (o instanceof Circle) {  
        drawCircle((Circle) o);  
    } else {  
        ...  
    }  
}
```

Violates the open/closed principle!

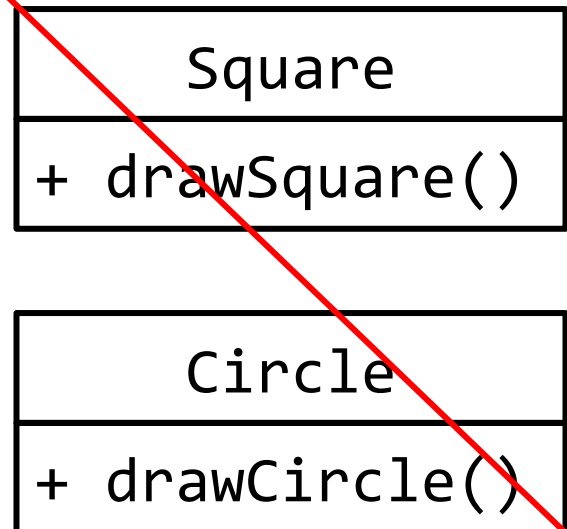


Open/closed principle

Software entities (classes, components, etc.) should be:

- **open** for extensions
- **closed** for modifications

```
public static void draw(Object s) {  
    if (s instanceof Shape) {  
        s.draw();  
    } else {  
        ...  
    }  
}
```

```
public static void draw(Shape s) {  
    s.draw();  
}
```

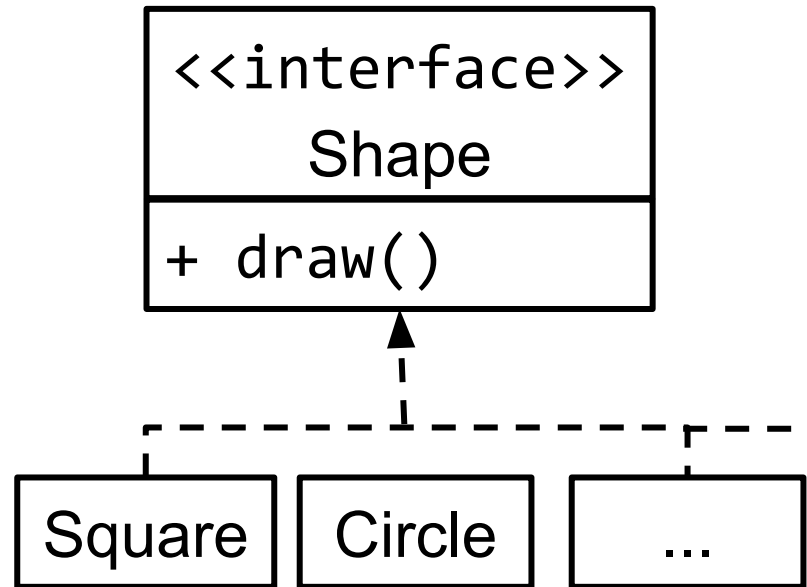

OO design principles

- Information hiding (and encapsulation)
- Polymorphism
- Open/closed principle
- **Inheritance in Java**
- The diamond of death
- Liskov substitution principle
- Composition/aggregation over inheritance


Inheritance: (abstract) classes and interfaces

SequentialList
{abstract}

LinkedList


Inheritance: (abstract) classes and interfaces

LinkedList extends SequentialList

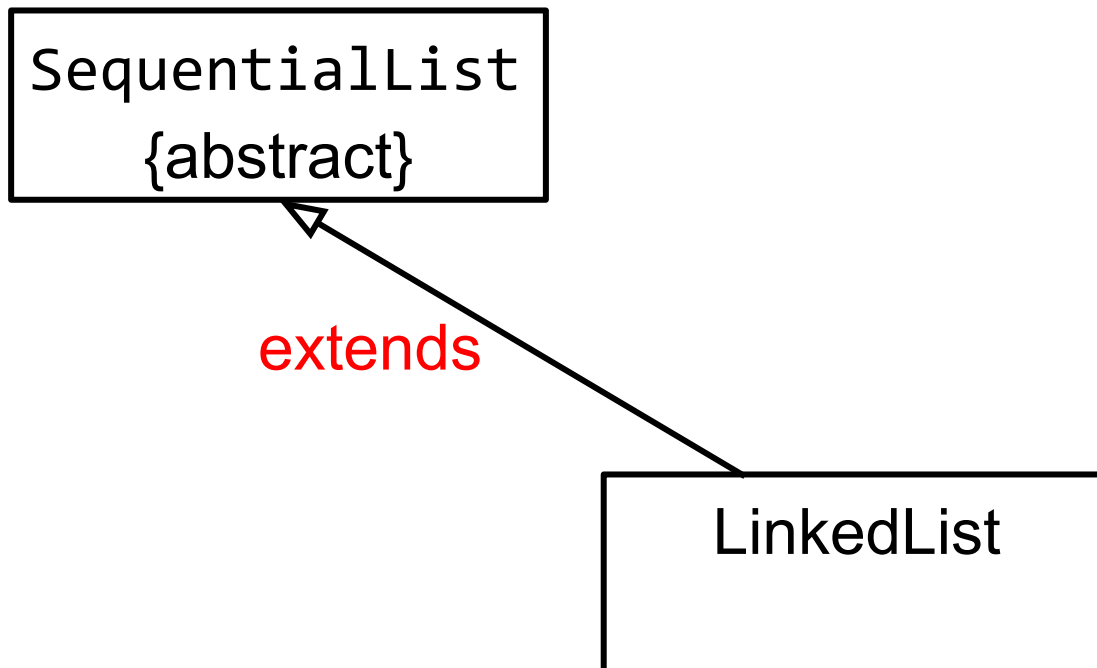


Inheritance: (abstract) classes and interfaces

LinkedList extends SequentialList

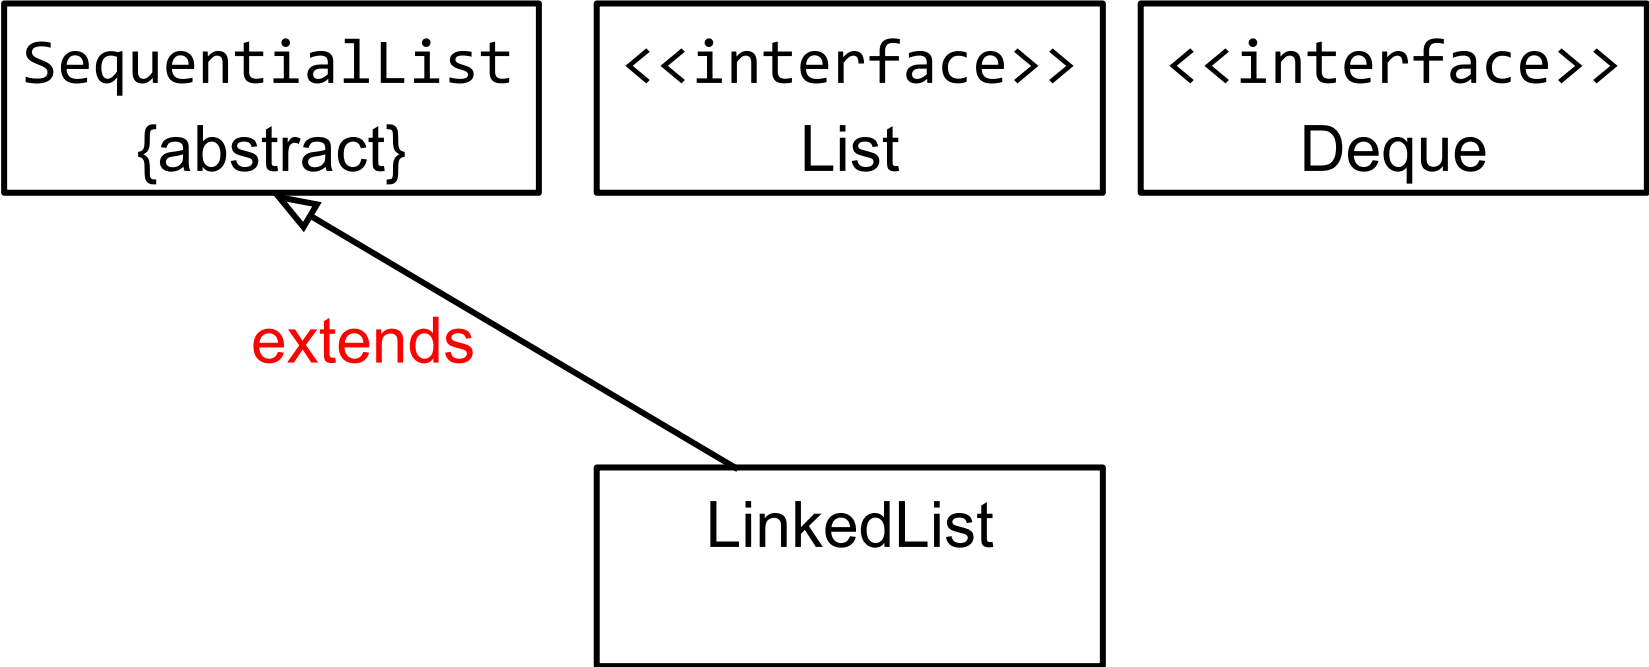

Inheritance: (abstract) classes and interfaces

LinkedList **extends** **SequentialList** **implements** **List**, **Deque**

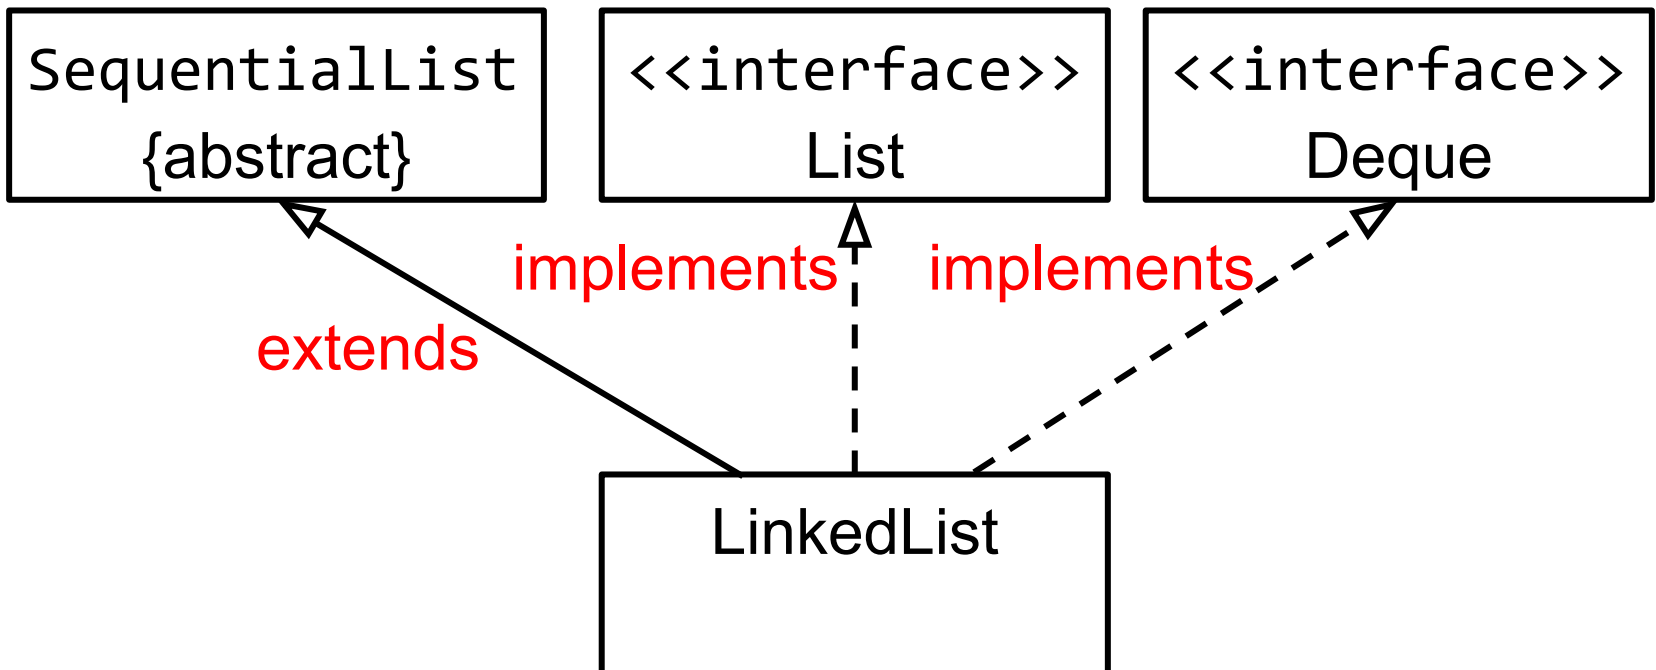


Inheritance: (abstract) classes and interfaces

<<interface>>
Iterable

<<interface>>
Collection


<<interface>>
List

Inheritance: (abstract) classes and interfaces

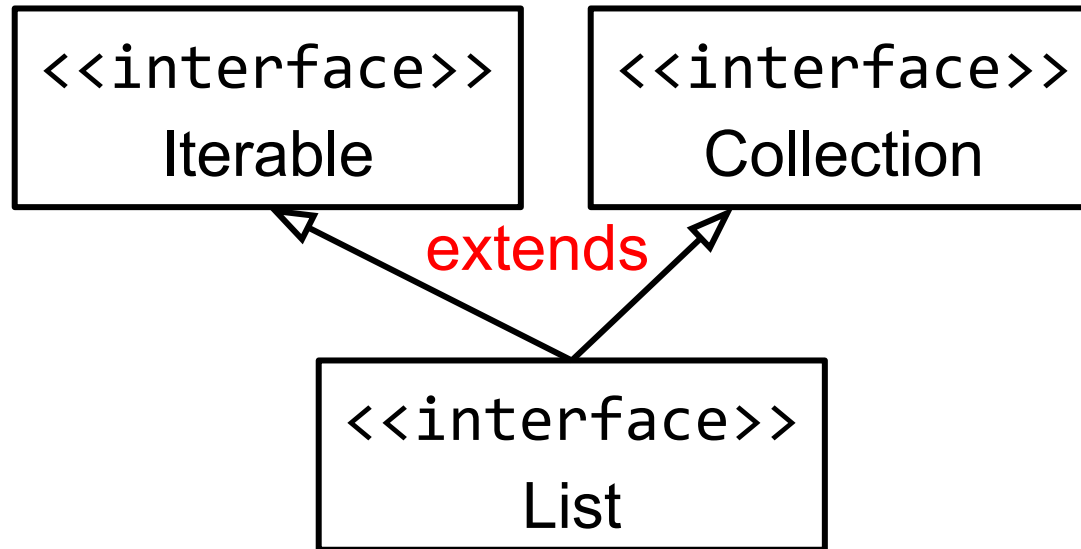

List extends Iterable, Collection

Inheritance: (abstract) classes and interfaces

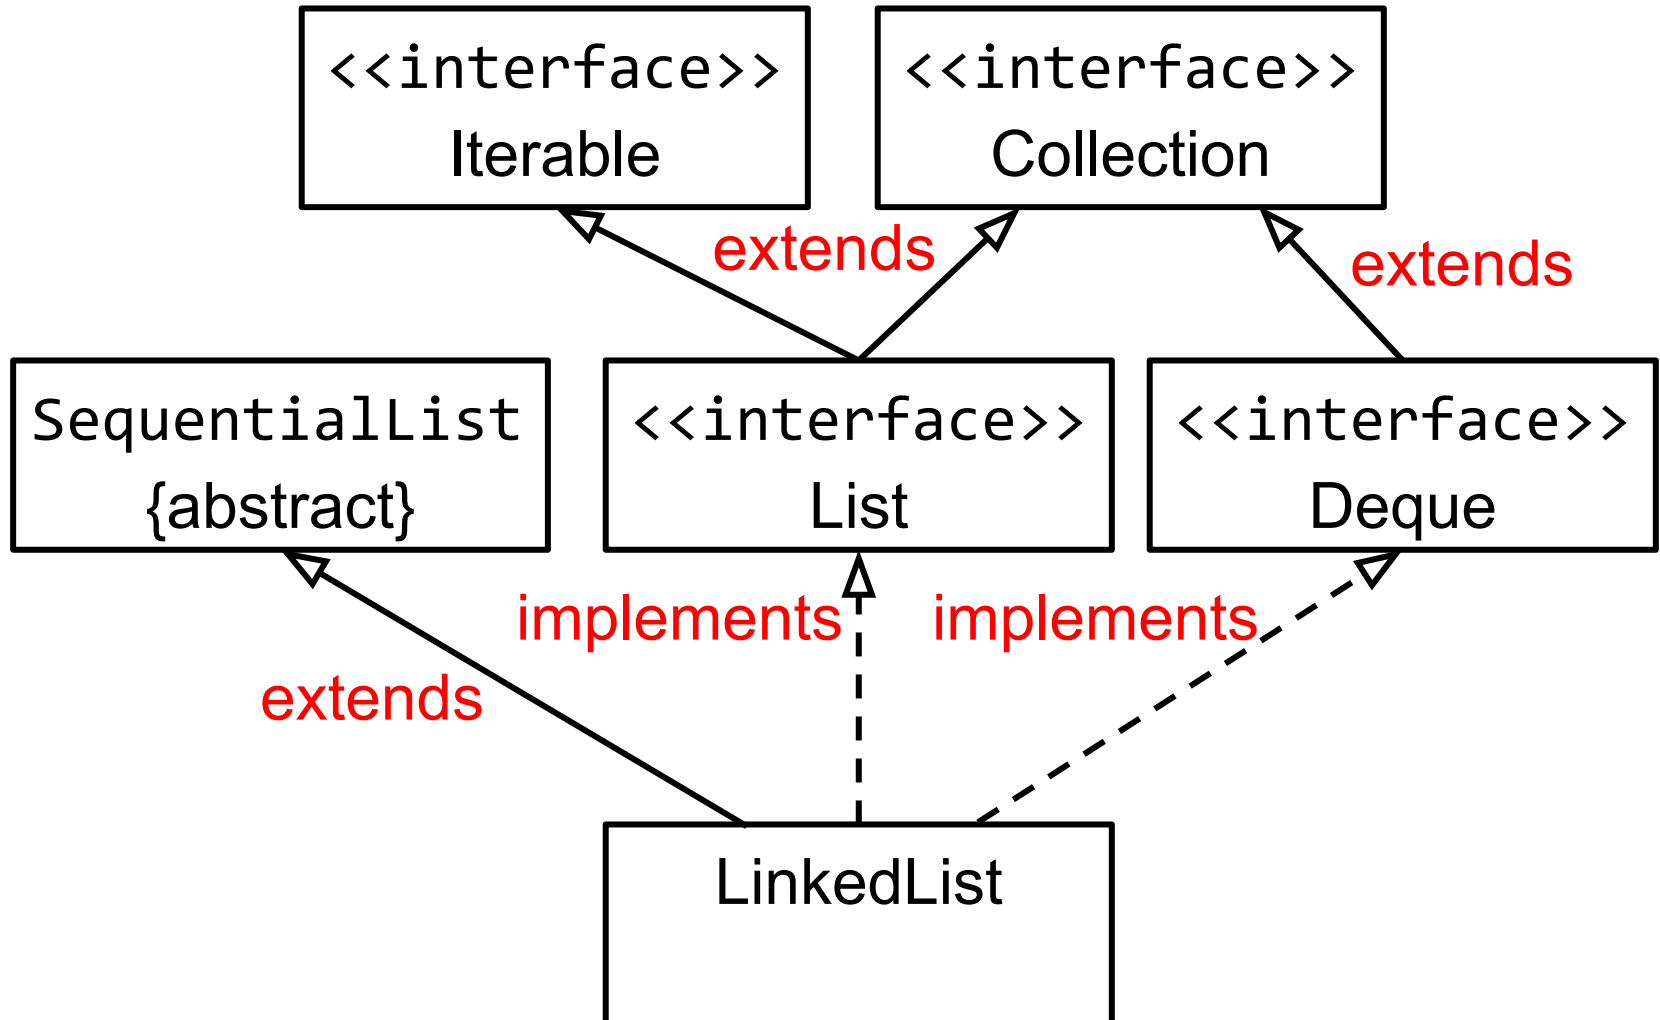


OO design principles

- Information hiding (and encapsulation)
- Polymorphism
- Open/closed principle
- Inheritance in Java
- **The diamond of death**
- Liskov substitution principle
- Composition/aggregation over inheritance

The “diamond of death”: the problem


```
...  
A a = new D();  
int num = a.getNum();  
...
```

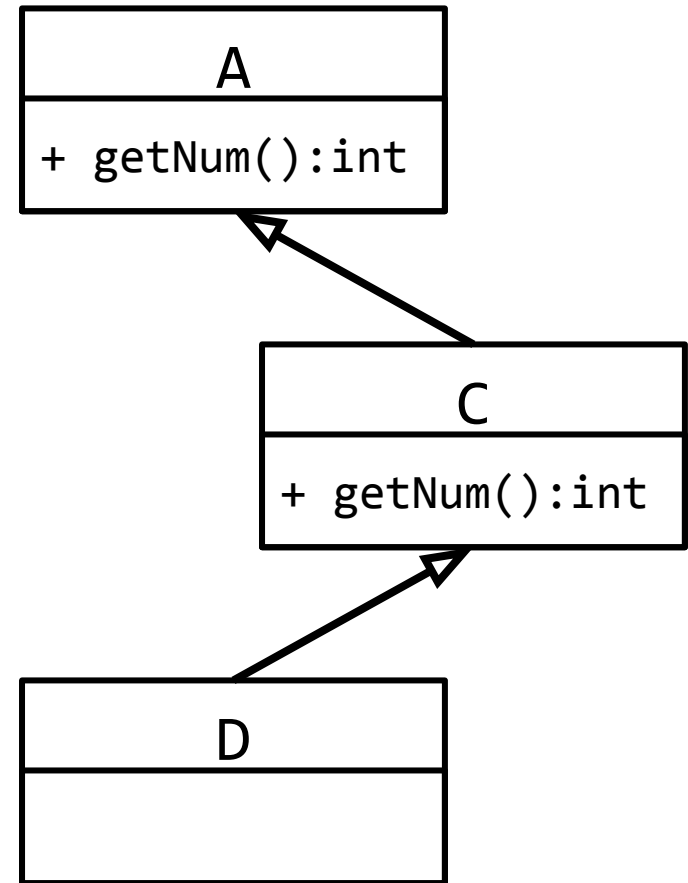


The “diamond of death”: the problem

```
...  
A a = new D();  
int num = a.getNum();  
...
```

Which `getNum()` method
should be called?

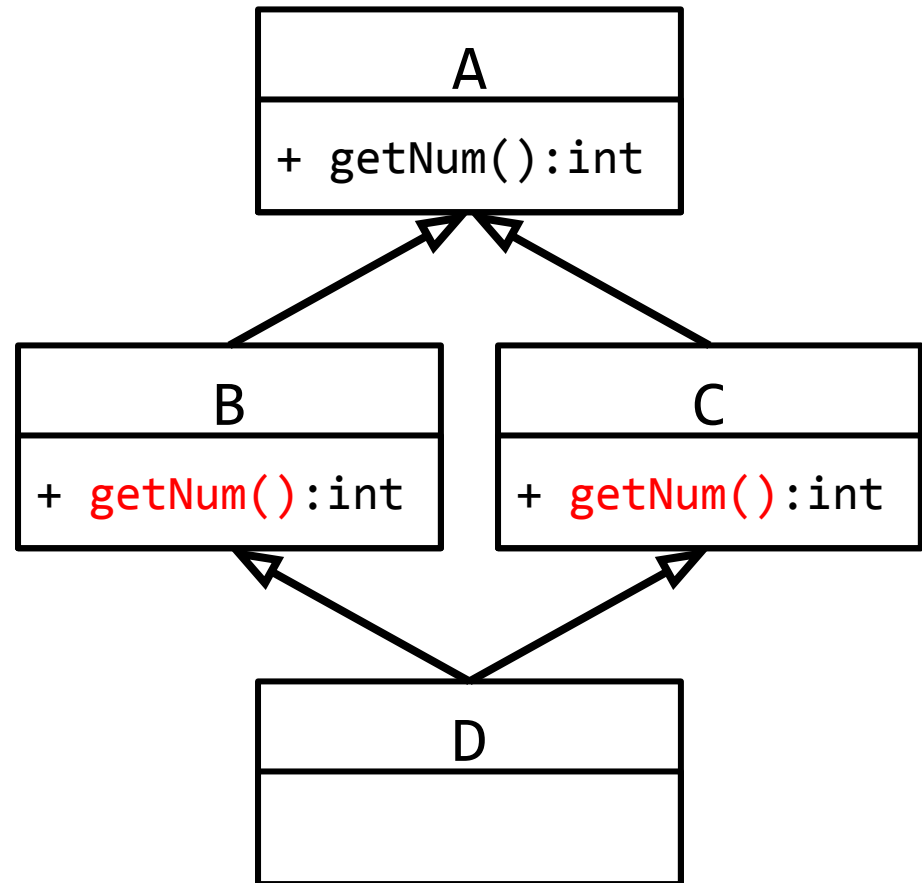

The “diamond of death”: concrete example

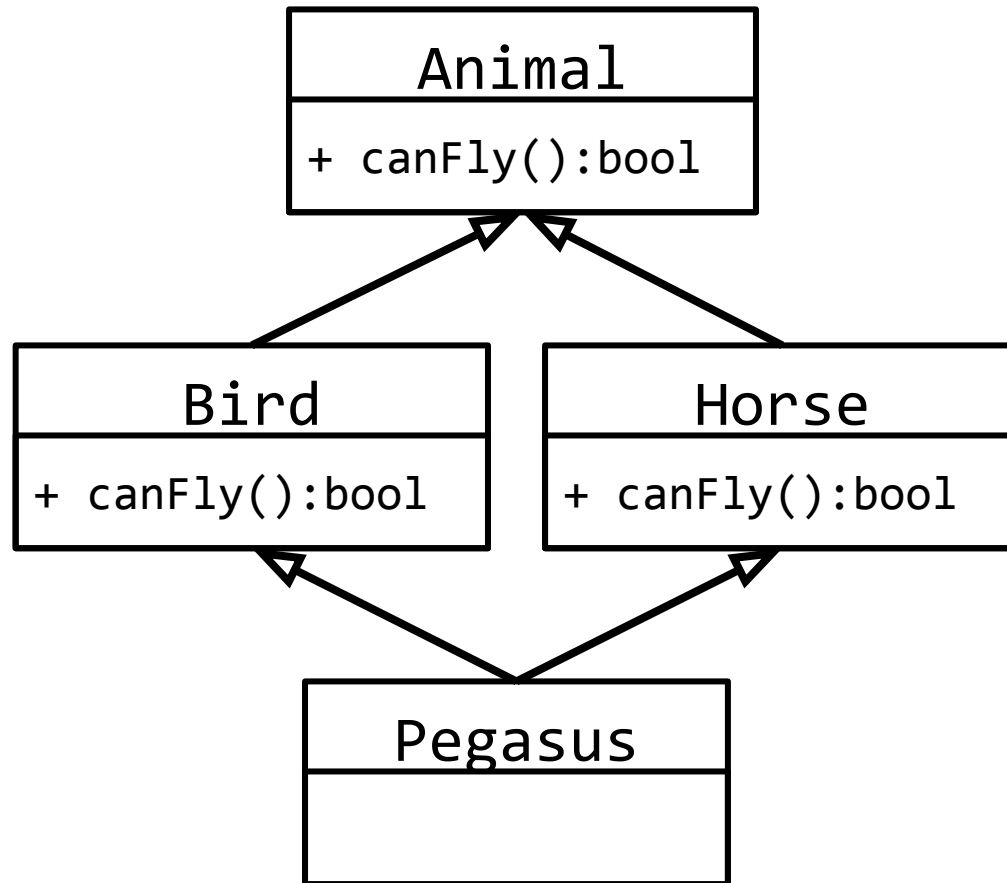

Can this happen in Java? Yes, with default methods in Java 8.



OO design principles

- Information hiding (and encapsulation)
- Polymorphism
- Open/closed principle
- Inheritance in Java
- The diamond of death
- **Liskov substitution principle**
- Composition/aggregation over inheritance

Design principles: Liskov substitution principle

Motivating example



We know that a square is a special kind of a rectangle. So, which of the following OO designs makes sense?

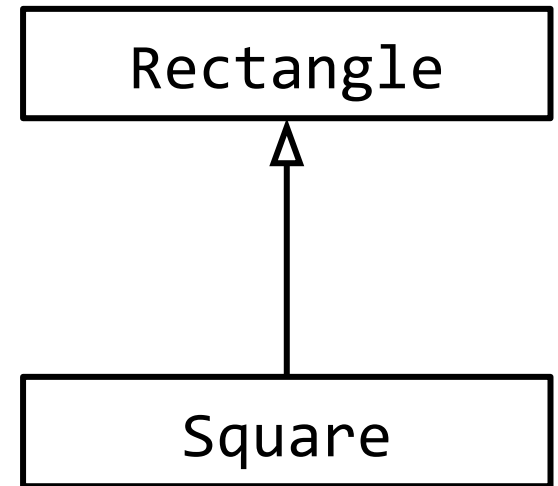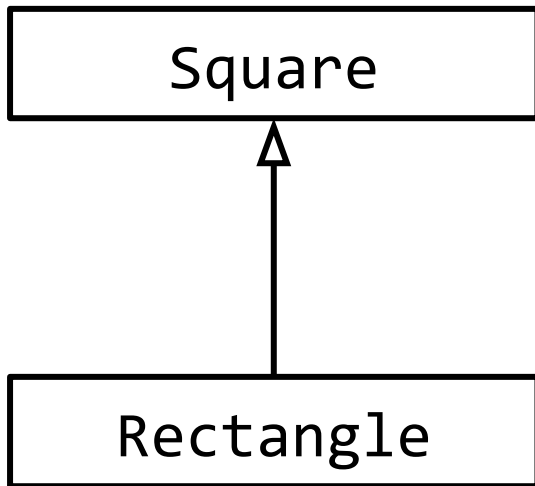

Design principles: Liskov substitution principle

Subtype requirement

Let object x be of type $T1$ and object y be of type $T2$. Further, let $T2$ be a subtype of $T1$ ($T2 \leq T1$). Any provable property about objects of type $T1$ should be true for objects of type $T2$.

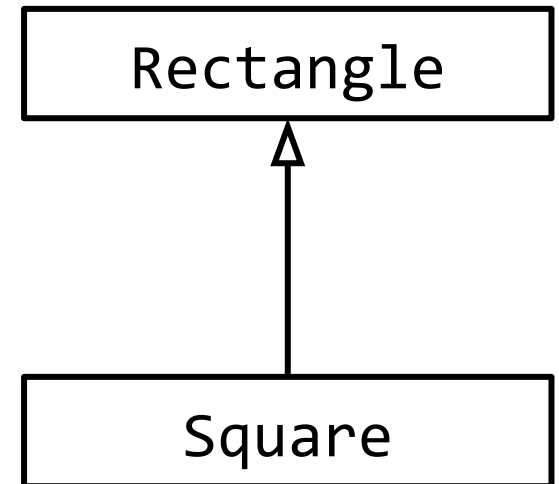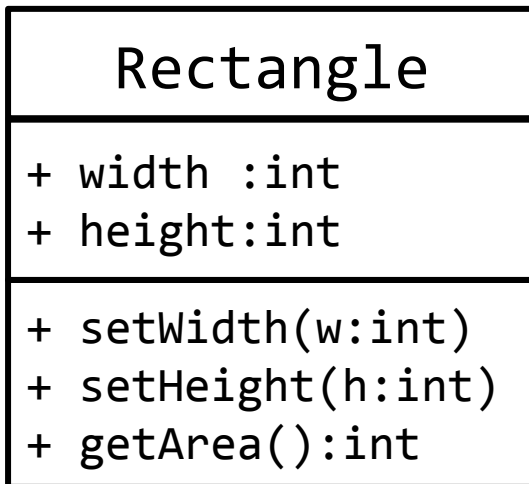


Is the subtype requirement fulfilled?


Design principles: Liskov substitution principle

Subtype requirement

Let object x be of type $T1$ and object y be of type $T2$. Further, let $T2$ be a subtype of $T1$ ($T2 \leq T1$). Any provable property about objects of type $T1$ should be true for objects of type $T2$.

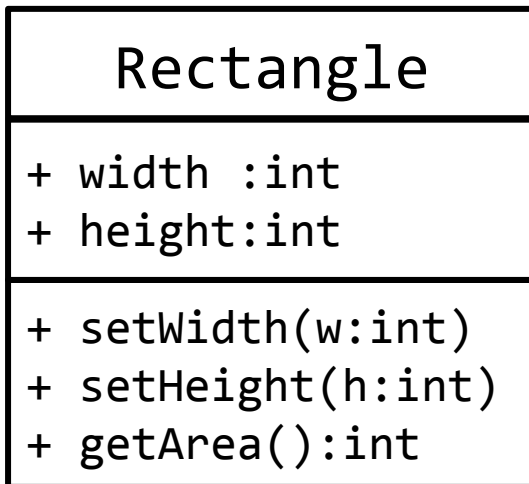


```
Rectangle r =  
    new Rectangle(2,2);  
  
int A = r.getArea();  
int w = r.getWidth();  
r.setWidth(w * 2);  
  
assertEquals(A * 2,  
    r.getArea());
```

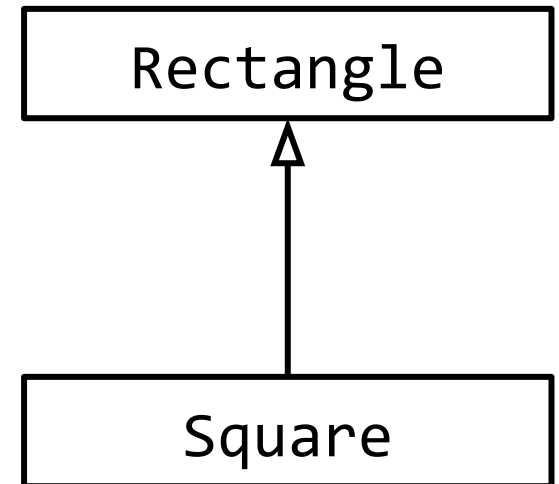


Design principles: Liskov substitution principle

Subtype requirement

Let object x be of type T1 and object y be of type T2. Further, let T2 be a subtype of T1 ($T2 \leq T1$). Any provable property about objects of type T1 should be true for objects of type T2.

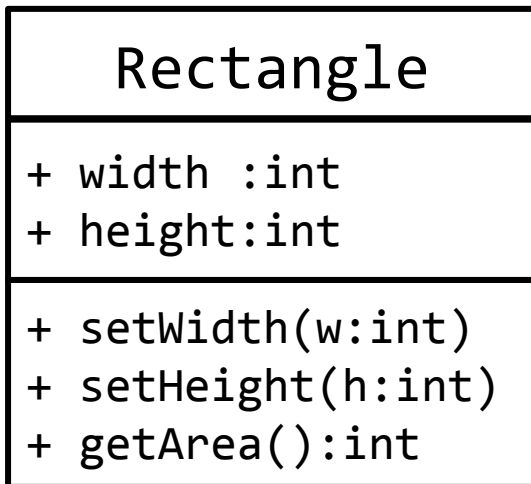


```
Rectangle r =  
new Rectangle(2,2);  
new Square(2);  
  
int A = r.getArea();  
int w = r.getWidth();  
r.setWidth(w * 2);  
  
assertEquals(A * 2,  
             r.getArea());
```

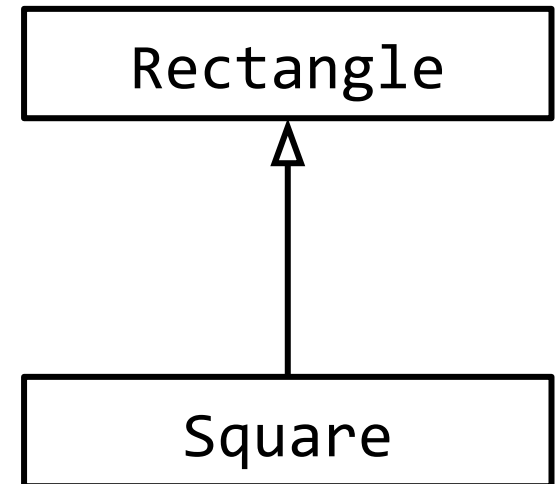


Design principles: Liskov substitution principle

Subtype requirement

Let object x be of type $T1$ and object y be of type $T2$. Further, let $T2$ be a subtype of $T1$ ($T2 \leq T1$). Any provable property about objects of type $T1$ should be true for objects of type $T2$.

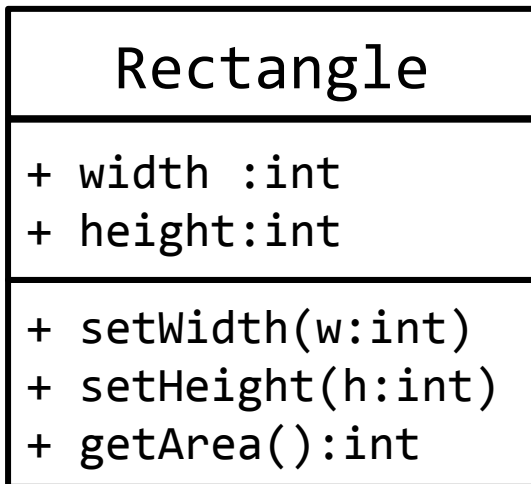

```
Rectangle r =  
new Rectangle(2,2);  
new Square(2);  
  
int A = r.getArea();  
int w = r.getWidth();  
r.setWidth(w * 2);  
  
assertEquals(A * 2,  
r.getArea());
```


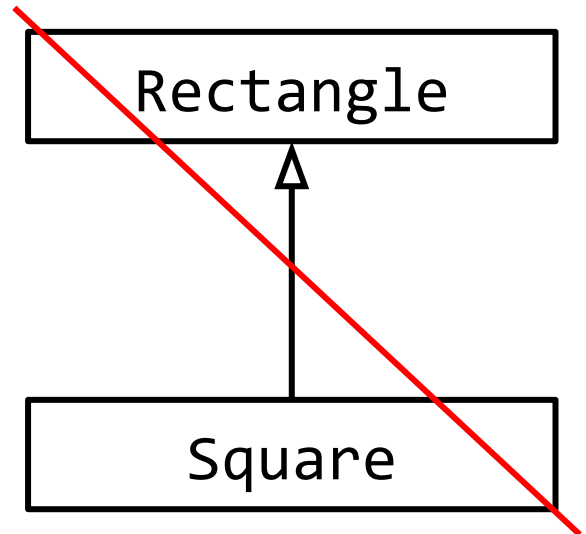


Violates the Liskov substitution principle!

Design principles: Liskov substitution principle

Subtype requirement


Let object x be of type $T1$ and object y be of type $T2$. Further, let $T2$ be a subtype of $T1$ ($T2 \leq T1$). Any provable property about objects of type $T1$ should be true for objects of type $T2$.

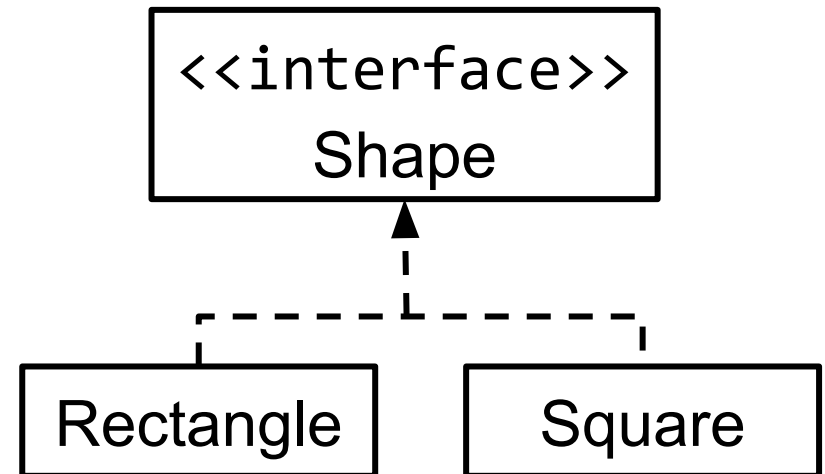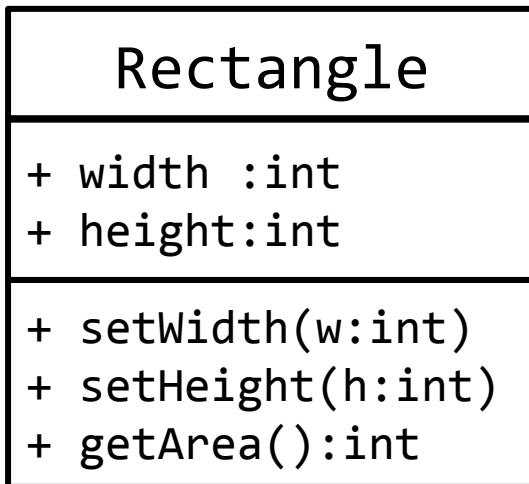

OO design principles


- Information hiding (and encapsulation)
- Polymorphism
- Open/closed principle
- Inheritance in Java
- The diamond of death
- Liskov substitution principle
- **Composition/aggregation over inheritance**

Inheritance vs. (Aggregation vs. Composition)

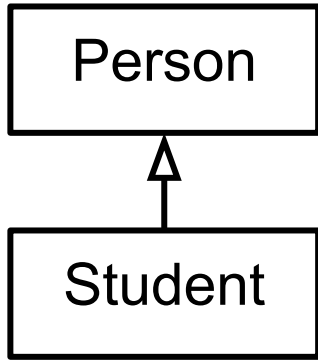


```
public class Student
  extends Person{
  public Student(){
  }
  ...
}
```

is-a relationship

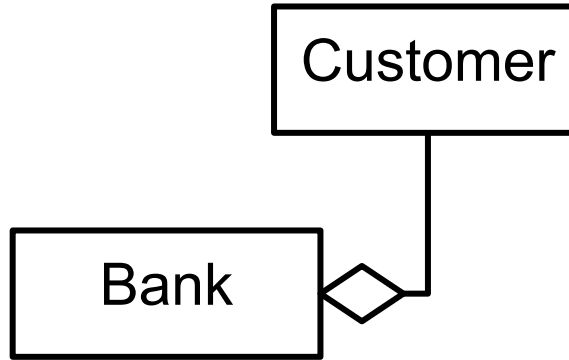


```
public class Bank {
  Customer c;
  public Bank(Customer c){
    this.c = c;
  }
  ...
}
```

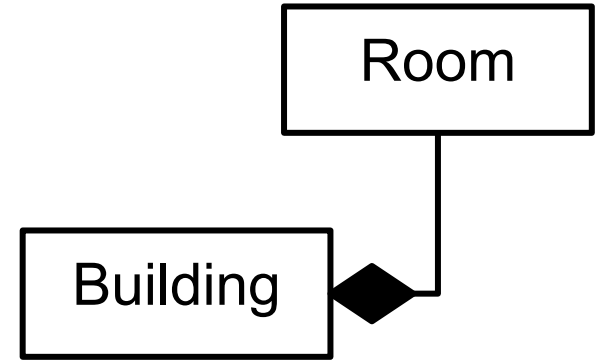


```
public class Building {
  Room r;
  public Building(){
    this.r = new Room();
  }
  ...
}
```

has-a relationship

Design choice: inheritance or composition?

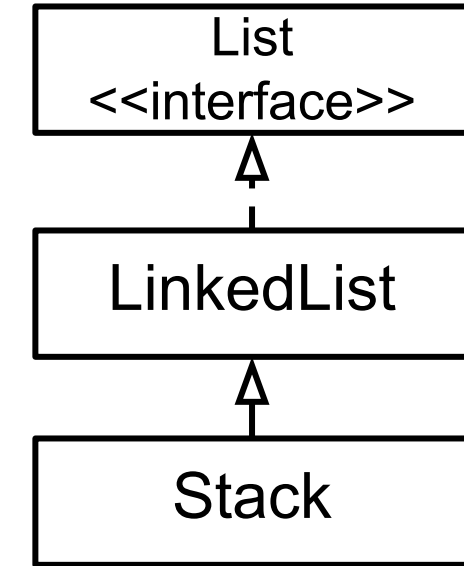


```
public class Stack<E>
    extends LinkedList<E> {
    ...
}
```

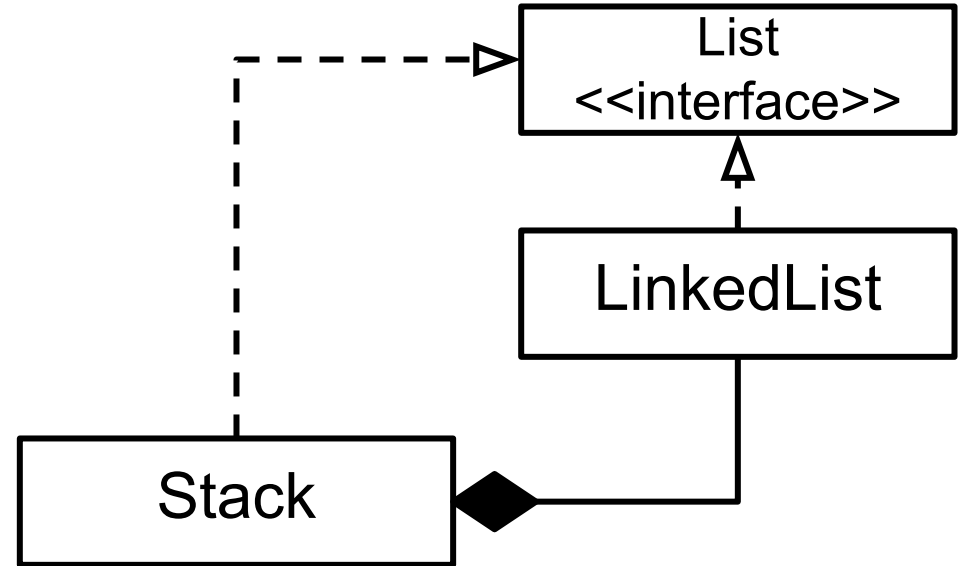

```
public class Stack<E> implements List<E> {
    private List<E> l = new LinkedList<>();
    ...
}
```

Hmm, both designs seem valid -- what are pros and cons?

Design choice: inheritance or composition?

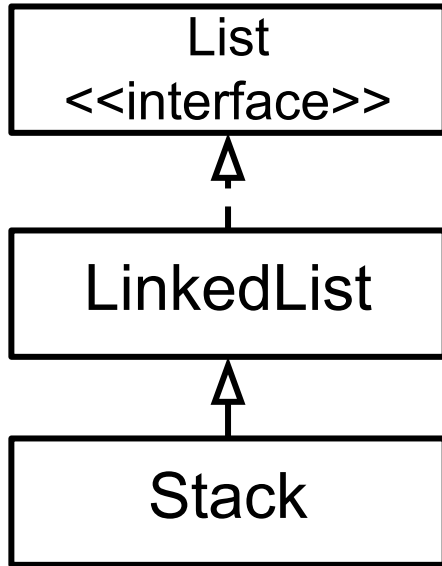


Pros

- No delegation methods required.
- Reuse of common state and behavior.

Cons

- Exposure of all inherited methods (a client might rely on this particular superclass -> can't change it later).
- Changes in superclass are likely to break subclasses.

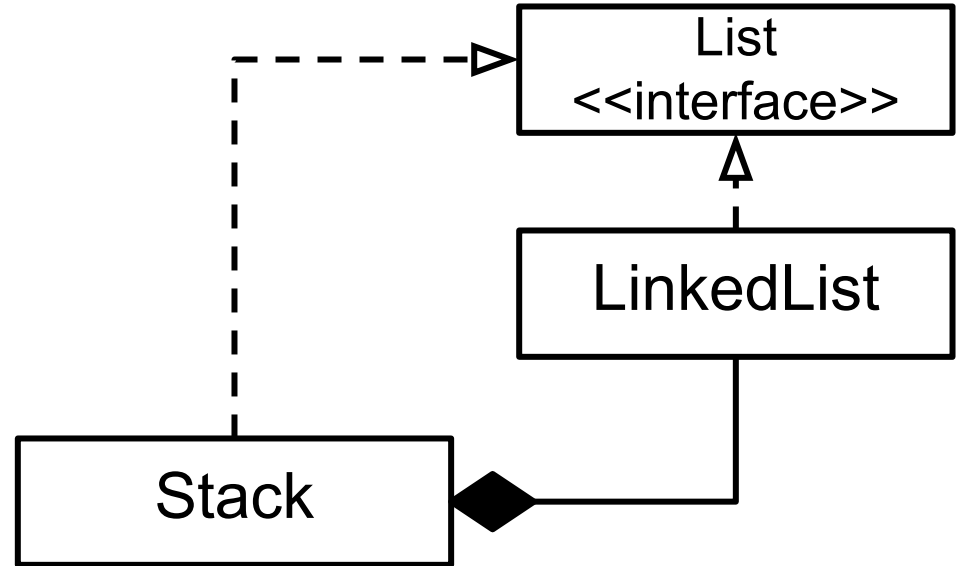

Pros

- Highly flexible and configurable: no additional subclasses required for different compositions.

Cons

- All interface methods need to be implemented -> delegation methods required, even for code reuse.

Composition/aggregation over inheritance allows more flexibility.

OO design principles: summary

- Information hiding (and encapsulation)
- Open/closed principle
- Liskov substitution principle
- Composition/aggregation over inheritance